


- Notes:
1. Variables: D = Depth of Pavement
 2. Removal and replacement also applies to full depth repairs at cracks.
 3. Place dowel bars in new joint with the greatest distance to the next transverse joint or working random crack. Place dowels on approach side of repair when distance to next transverse joint or working random crack is equal for both new joints.

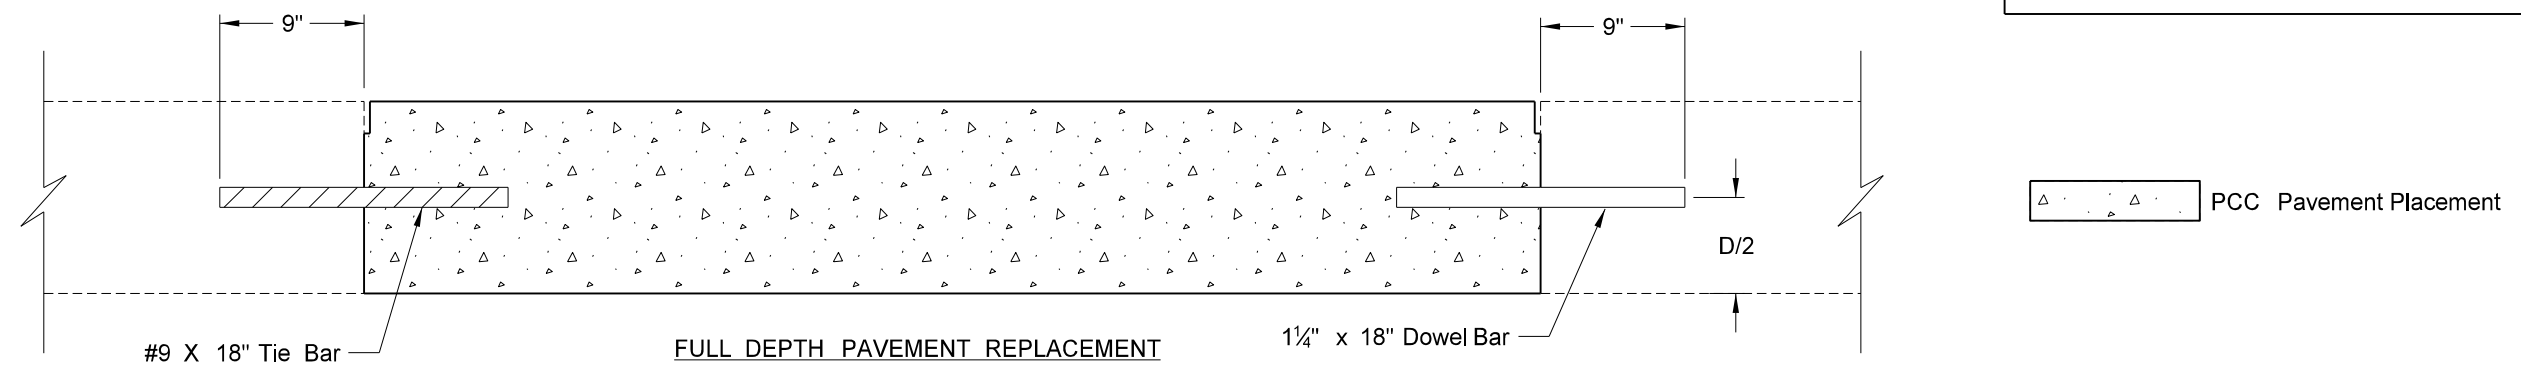

Jointed Concrete Pavement Repair
 Full Depth, Non-Reinforced PCC Pavement
 (Longitudinal Length Less than One Panel)

Project Description
 Project Location

This document
 is preliminary
 and not for
 construction or
 implementation
 purposes.