
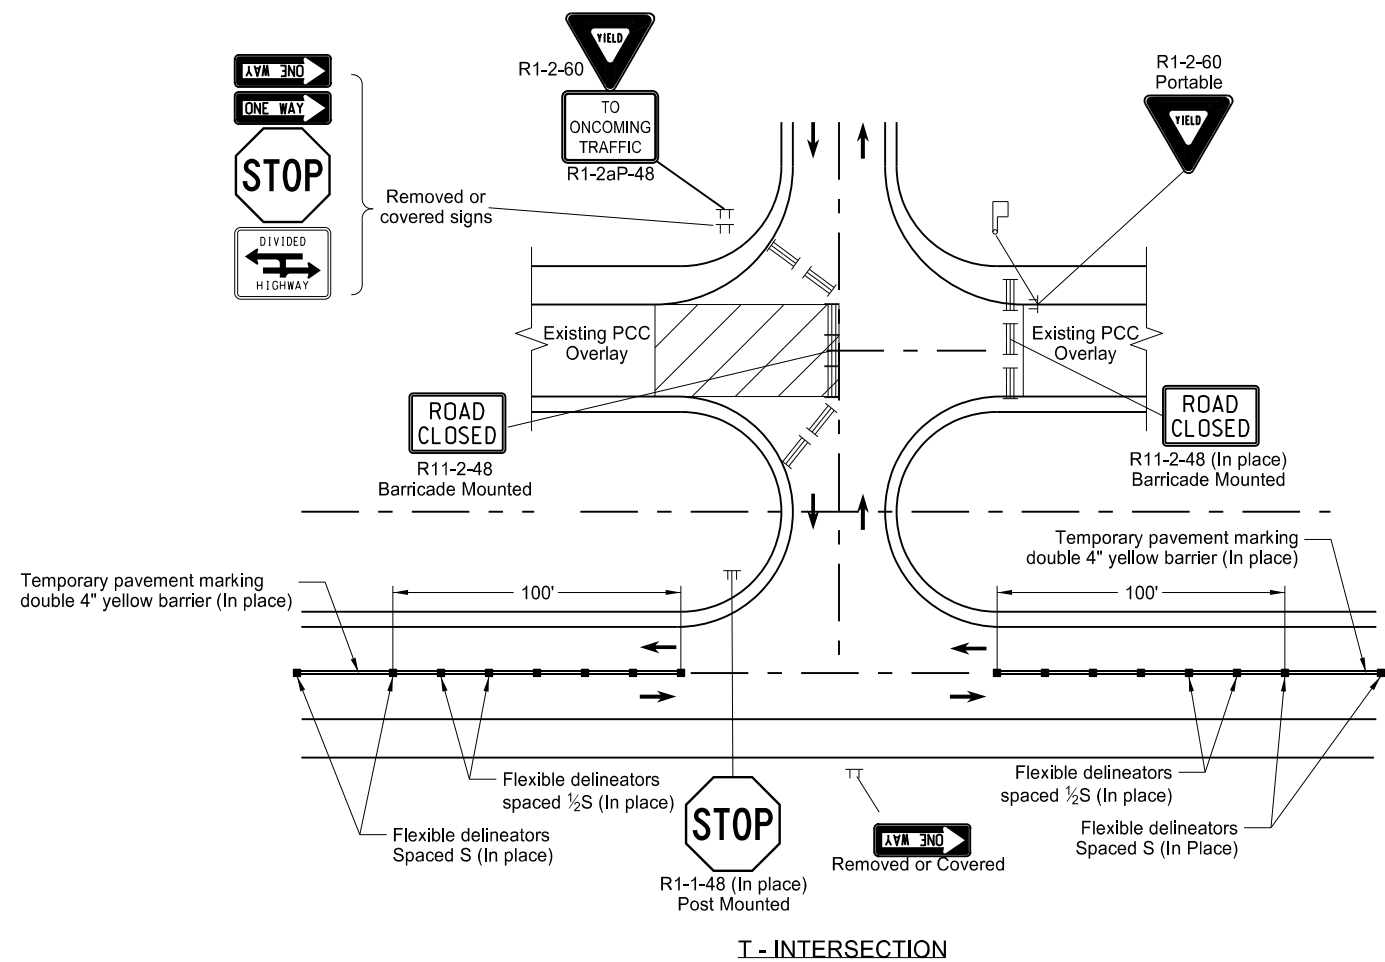


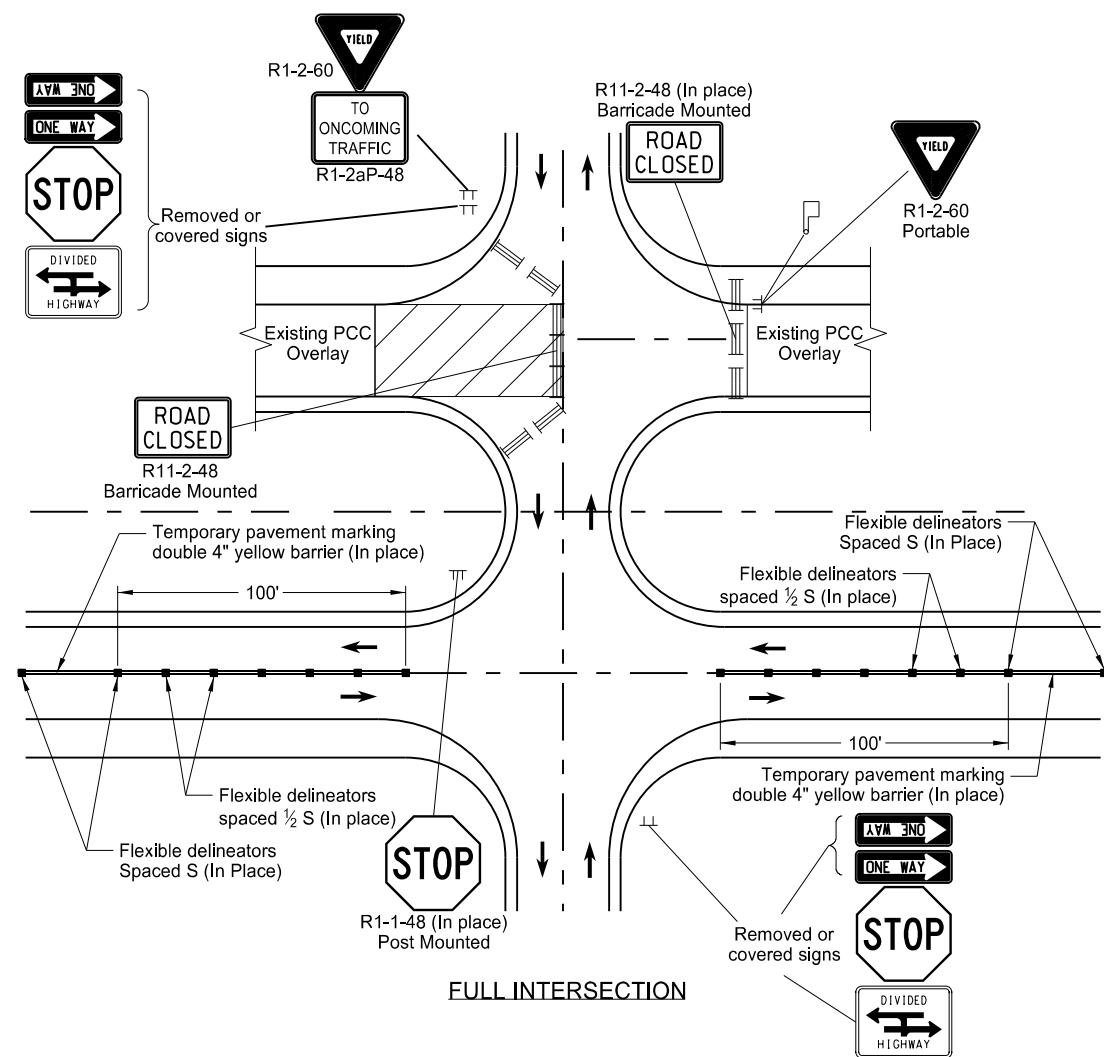

- Notes:
1. Use in coordination with standard D-704-63 "One Road Closure Four-Lane Divided Highway for Access to Two-way Two-lane Roadway". All signs and devices shown as (In place) were installed in accordance with Standard D-704-63.
  2. Roadway under construction is expected to be closed to all traffic. If the contractor chooses to use the roadway under construction for access via the cross road or chooses to use the roadway under construction as a haul road, provide the following traffic control: Place yield signs for construction traffic at low volume crossings. Place yield sign and a flagger for construction traffic at high volume crossroads. Do not stop public traffic on the crossroads for construction traffic. Engineer determines which cross roads are low or high volume.
  3. Use this detail only during the time approach traffic is unable to use the hatched area.
  4. To gain access to the closed roadway, position barricades in a location that will not interfere with the sight distance of haul vehicles. Place barricades in their original position at the end of the work day.

| KEY |                        |
|-----|------------------------|
|     | Work Area              |
|     | Flagger                |
|     | Type III Barricade     |
|     | Sign                   |
|     | Tubular Markers        |
|     | Sequencing Arrow Panel |

Median Crossing Paving (half at a time) Layouts

Project Description  
Project Location

This document  
is preliminary  
and not for  
construction or  
implementation  
purposes.