

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	Project Number	20	Sheet


Notes:

- No deduction in measured pay length of woven wire fence for corner assemblies, single brace assemblies, double brace assemblies or fence terminals.
- Additional material and labor for each corner assembly, single brace, double brace, or fence terminal will be paid for at the bid price for that Assembly or Terminal.
- Install Assemblies or Terminals at locations shown on the plans or established by the Engineer.
- Staple the top wire of woven wire fence separately. Staple intermediate wires a maximum spacing of 10" apart. Staple bottom wire separately.
- If in the opinion of the Engineer the change in grade is so sharp that woven wire will not conform to the grade, install a double brace.


WILDLIFE FENCING SUMMARY (FOR INFORMATION PURPOSES ONLY)			
Chain	Station Range	Offset	8' Wildlife Fence Woven Wire (LF)
XXXX	xxxx+xx to xxxx+xx	Lt	22,590
YYYY	xxxx+xx to xxxx+xx	Rt	22,361
TOTAL =			44,951

Notes:


- Refer to Section 80 for proposed fencing layouts.

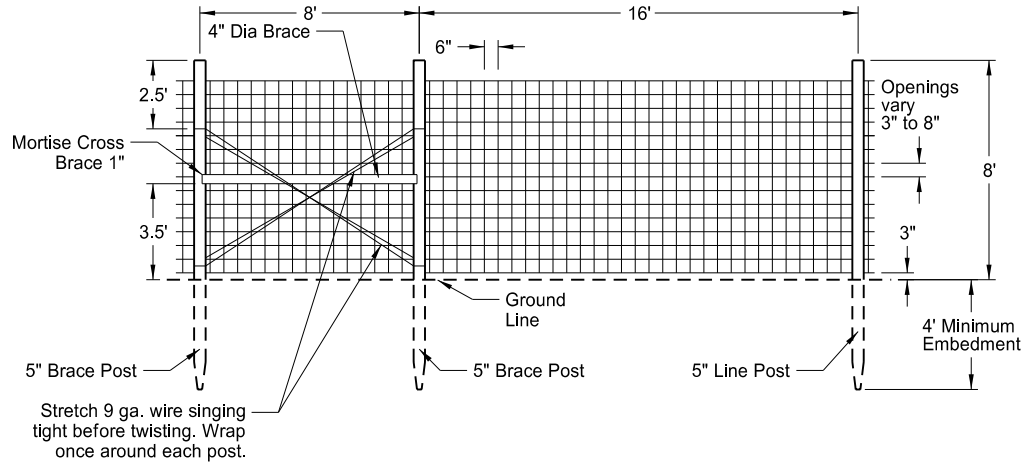

Typical Line Fence with Single Brace Assembly  
(Spaced at 320' Intervals)

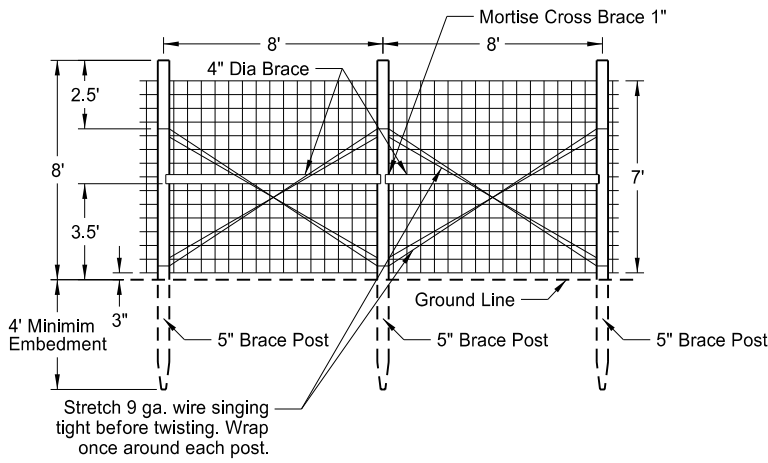


Double Brace Assembly & Fence Terminal

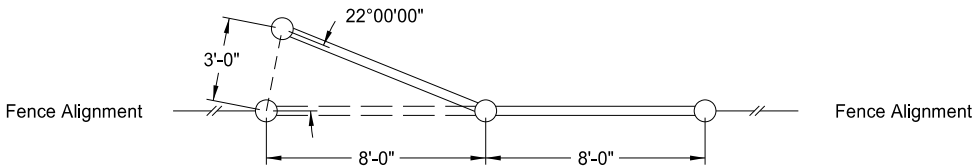


Decision Criteria for Inline Double Brace Vs. Corner Structure

Note: If fence deflects more than 3'-0" from alignment, a standard corner assembly is required. Otherwise use an inline double brace assembly.

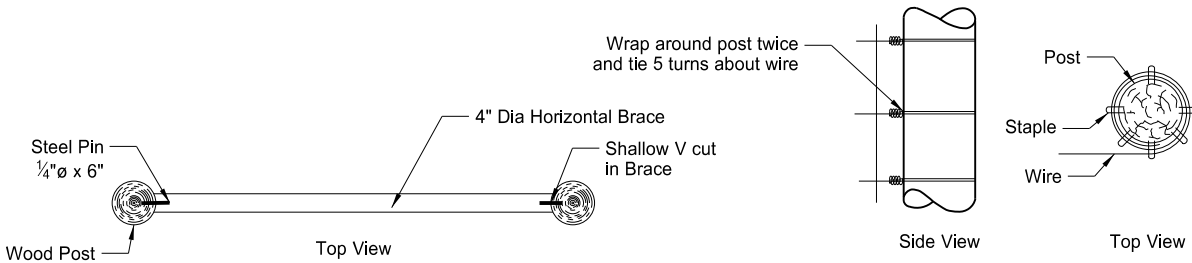


Horizontal Brace Detail


Wrap-Around Detail

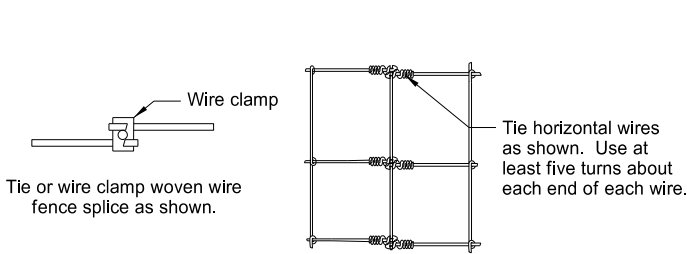

Splice Detail

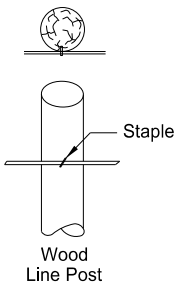

Fastening to Posts

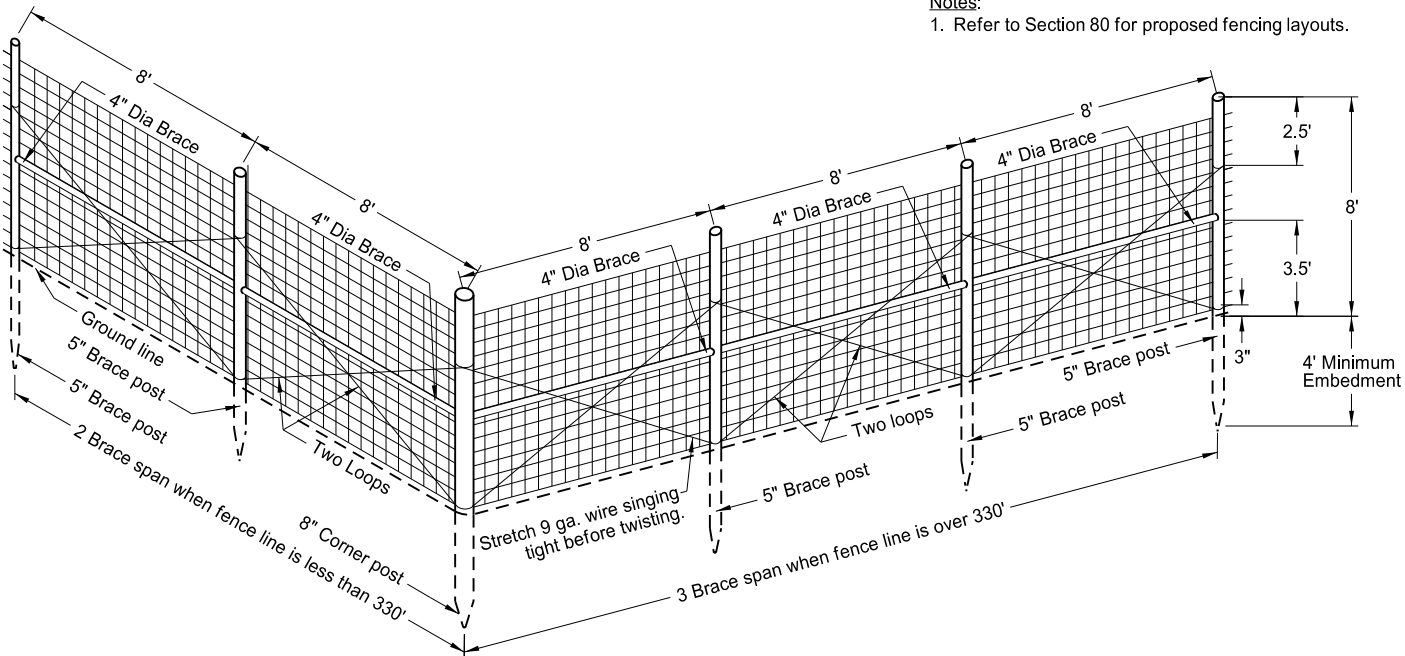

Corner Assembly

WILDLIFE FENCING 8'-0" HEIGHT		
POST SIZES		
Use of Post	Treated Wood	
	Post Dia	Minimum Post Length
Line Post	5"	12'
Corner Post	8"	12'
End Post	5"	12'
Brace Post	5"	12'
Gate Post	8"	12'
Horizontal Brace	4"	Varies

8'-0" Height Woven Wire Wildlife Fencing

Project Description

Project Location

This document  
is preliminary  
and not for  
construction or  
implementation  
purposes.