
	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	Project Number	20	sheet

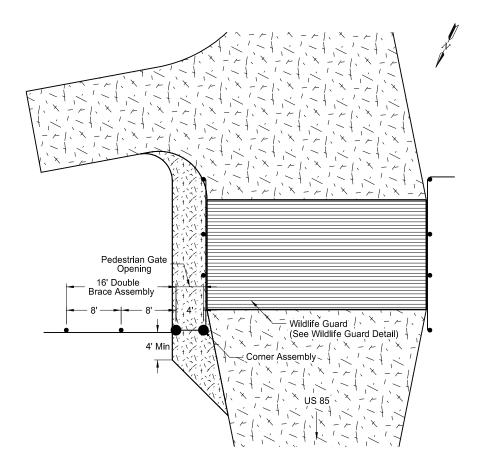

4' Wide Pedestrian Gate - Plan View 8'-0" Woven Wire Fence Height

WILDLIFE FENCING PEDESTRIAN GATE SUMMARY (FOR INFORMATION PURPOSES ONLY)					
Chain	Station	Offset	8' Height Pedestrian Gate		
			4' Width		
			(EA)		
XXXX	xxxx+xx	Rt	1		
TOTAL =			1		

Notes:

1. Refer to Section 80 for proposed fencing layouts.

Notes: Provide latch that allows for one handed operation, releases to allow gate to swing in either direction, and can be locked. Include all costs for labor, equipment, and materials to supply and install pedestrian gates according to the above details or as approved by the Engineer in the unit price bid for "PEDESTRIAN GATE".	Wrap around post twice and tie 5 turns about wire	₹%" Dia Hex Nut
Double brace assemblies will be measured and paid for separately. No deduction in measured pay length of woven wire fence for double brace assemblies. Additional material and labor for each double brace assembly will be paid for at the bid for "DOUBLE BRACE ASSEMBLY WOVEN MADE STILL".	Side View Top View	%" Dia x 12" Bolt Hook Hinge (Typ)

Wrap-Around Detail

Gate Hinge Detail

- Grade to Drain Away From Pedestrian Gate

 $-\frac{7}{8}$ " Dia x 12" Bolt Hook Hinge (Typ)

6" Aggregate Base Course CI 5

4' Wide Pedestrian Gate

8'-0" Woven Wire Fence Height

Wildlife Guard Opening (See Wildlife Guard Detail)

Project Description Project Location

8'-0" Height Woven Wire Fence Pedestrian Gates

This document is preliminary and not for construction or (a) implementation purposes.

4. Engineer has the authority to modify grading to ensure gates can open adequately.

Ground Line

– 5" Brace Post

2" Dia Painted Steel Tube -

(Typ.) at 10" Centers

Latch (See Note 1)

- 5" Brace Post

Stretch 9 ga. wire singing tight before twisting. Wrap

once around each post.

16' Double Brace Assembly -

8" Gate Post

Pedestrian Gate Opening

"DOUBLE BRACE ASSEMBLY WOVEN WIRE 8FT".

2.5'

4' Minimum