

User Delay Costs Due to Work Zone Operations Near Echo Junction

Peter T. Martin, Ph.D., P.E., (UK)
Professor

Bhagavan Nadimpalli,
Graduate Research Assistant

University of Utah

November 2010

Acknowledgements

The authors thank the following for their contributions to the research:

- Eric Rasband, Traffic Engineer, Traffic Operations Center, UDOT
- Glenn Blackwelder, Traffic Mobility Engineer, Traffic Operations Center, UDOT

UDOT personnel in the Technical Advisory Committee:

- David Kinnecom, Project Manager, Traffic Operations Center, dkinnecom@utah.gov, (801) 887-3707
- Glenn Blackwelder, Traffic Mobility Engineer, Traffic Operations Center, gblackwelder@utah.gov, (801) 887-3674
- Eric Rasband, Traffic Engineer, Traffic Operations Center, ericrasband@utah.gov, (801) 887-3446
- Rukhsana Lindsay, Research Engineer, Division of Research & Development, UDOT, slindsay@utah.gov, (801) 576-7700

Disclaimer

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented. This document is disseminated under the sponsorship of the Department of Transportation, University Transportation Centers Program, in the interest of information exchange. The U.S. Government assumes no liability for the contents or use thereof.

North Dakota State University does not discriminate on the basis of age, color, disability, gender identity, marital status, national origin, public assistance status, sex, sexual orientation, status as a U.S. veteran, race or religion. Direct inquiries to the Vice President for Equity, Diversity and Global Outreach, 205 Old Main, (701)231-7708.

TABLE OF CONTENTS

EXECUTIVE SUMMARY 1

1. INTRODUCTION..... 1

 1.1 Project Description 1

 1.2 Research Objective 2

2.0 RESEARCH METHODOLOGY 3

 2.1 Developing Reconstruction Closure Scenarios 4

3.0 RESULTS 5

4.0 CONCLUSIONS 7

5.0 FUTURE WORK..... 9

6.0 REFERENCES..... 11

LIST OF FIGURES

Figure 2.1	Flow Diagram of Work Methodology	3
Figure 2.2	VISSIM Model of the I-80 Echo interchange.....	4
Figure 3.2	Results for Echo Scenario.....	5
Figure 3.3	Results for Weber Scenario	6

LIST OF TABLES

Table 3.1	Average Daily User Delay Costs for Echo and Weber Scenario	5
-----------	--	---

LIST OF ACRONYMS

AADT	Annual Average Daily Traffic
ABC	Accelerated Bridge Construction
ADT	Average Daily Traffic
DB	Design Build
RUC	Road User Cost
STIP	State Transportation Improvement Plan
TB	Traditional Build
UDOT	Utah Department of Transportation
UTL	Utah Traffic Lab
VOT	Value of Time
VHT	Vehicle Hours Traveled

EXECUTIVE SUMMARY

With the increasing number of road rehabilitation projects across the United States, the need to reduce user costs due to congestion is more important than ever. The Utah Department of Transportation (UDOT) has proposed replacing two I-80 bridges over Echo Dam Road and Weber River in Summit County. The proposed project includes removal of the existing structures and approaches, followed by construction of the new bridges. The proposed structures will be designed and built to allow for future bridge deck replacement while maintaining two-way traffic. The method of bridge replacement will be Accelerated Bridge Construction (ABC). This study evaluates the impact of proposed replacement on the travelers in Summit County. The purpose of this research is to provide UDOT an estimation of possible delay costs due to congested traffic resulting from the proposed work zone scenarios. The VISSIM micro-simulation tool is used to build and calibrate the models. Hourly traffic volumes, provided by UDOT, are added as vehicle inputs into the model. Two work zone scenarios were developed by UDOT: Echo and Weber River. In each scenario, one direction of traffic is closed at a time, while the opposite direction remains open for traffic. For the closed-direction, ramps are used as detours. Both these scenarios are simulated and user delay costs are measured separately. Results for both the Echo and the Weber River scenarios show that the average daily user delay cost is lowest on Mondays and Tuesdays. This suggests that UDOT can complete the proposed ABC work on these days, to ensure minimum traffic disruption to travelers. The future work consists of estimating user delay costs caused by the replacement of the bridge on 2300 East on I-80. Similar analysis is required to determine the day of the week that would have minimum daily user cost.

1. INTRODUCTION

The Utah Traffic Lab (UTL) completed several research projects for the Utah Department of Transportation (UDOT) to evaluate the impact of highway construction on road users. All these studies dealt with the impact of various construction scenarios on travelers. The impacts have been measured as hours of delay, percentage of congested roads, and money values. Road User Costs (RUCs) in the work zone include added vehicle operating costs and delay costs to highway users resulting from construction, maintenance, or rehabilitation activity. The RUCs are a function of the timing, duration, frequency, scope, and characteristics of the work zone, as well as the volume and operating characteristics of the traffic affected. In addition, the dollar cost rates assigned to vehicle operations and delays affect the RUCs (1).

The first UTL study evaluates various construction alternatives for reconstruction of I-15 in Salt Lake County, Utah. Three scenarios are compared. The three scenarios are Design Build (DB), Traditional Build (TB), and No Build (NB). The DB method, also known as Fast Track (FT), is used for the reconstruction and is shown to be the best scenario, in terms of user delays. The second study is a compilation of several State Transportation Improvement Plan (STIP) projects. The research analyzes the STIP projects for FT and TB contracting methods to identify the impacts of each method on road users. The scope of this study is limited to analyzing five selected STIP projects within Salt Lake County and modeling various build scenarios using transportation planning tools. In general, the FT method is shown to be the best at minimizing RUCs. In the third study, several different work zone scenarios are developed and modeled in VISUM simulation software. Traffic assignments are run in each scenario for five diurnal periods.

The subject in this report is one of the several Accelerated Bridge Construction (ABC) projects that will be investigated by UTL for UDOT. The work zone scenarios proposed by UDOT are analyzed and the best scenario was selected based on the total user costs.

1.1 Project Description

UDOT proposes replacing two bridge structures near Echo Dam Road on I-80 and Weber River in Summit County, Utah. The proposed work includes removal of the existing spans and approaches and replacing them with new structures. The proposed structures are to have a minimum width and minimum length sufficient to accommodate the specified requirements (3). The structures will be designed and constructed to allow for future bridge deck replacement, while maintaining two-way traffic. The method of bridge replacement will be Accelerated Bridge Construction (ABC). Maintenance of traffic during construction is a critical component of the work. This study evaluates the impacts of proposed replacement on the travelers in the Summit area. This research will provide UDOT an estimation of possible delay costs due to congested traffic resulting from the proposed work zone scenarios.

1.2 Research Objective

The goal of this report is to provide UDOT with probable user delay costs resulting from the replacement of the two bridges near Echo interchange. The objective of this project is to evaluate scenarios of work zone closures so that UDOT can specify requirements for MOT plans in request for proposal. In other words, based on the results, UDOT will be able to specify the impact of lane closures and other actions that should be taken to keep traffic moving during construction. VISSIM micro-simulation tool is used to estimate the increased delays while construction is ongoing.

The report is organized as follows: Research methodology is described in Section 2 followed by the analysis results and discussion in Section 3. Section 4 consists of the conclusions drawn from the study.

2. RESEARCH METHODOLOGY

The methodology followed in this research follows:

- Build simulation model in VISSIM micro-simulation analysis platform.
- Obtain the hourly traffic volumes collected by UDOT.
- Data calibration and Validation.
- Run assignments for No Build scenario and find total Vehicle Hour Traveled (VHT).
- Assign work zone operations separately for both Echo and Weber River scenarios.
- Run simulations for both Echo and Weber River scenarios separately and find total VHT.
- Find the increased VHT and multiply it with separate VOT for cars and trucks.
- Find daily user delay costs for Monday, Tuesday, Saturday, and Sunday for July and August 2008.

Figure 2.1 shows a flow diagram of the general plan used to calculate traffic delay costs.

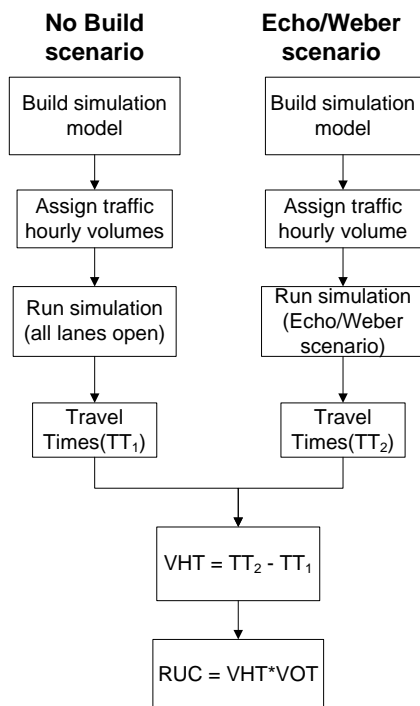


Figure 2.1 Flow Diagram of Work Methodology

The I-80 echo interchange network was constructed using VISSIM micro-simulation tool. Figure 2.2 shows the same.

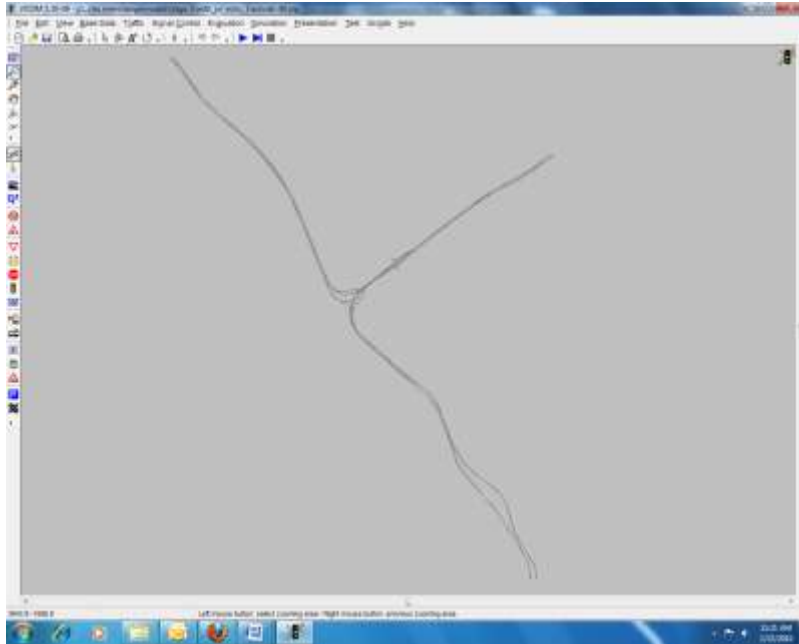


Figure 2.2 VISSIM Model of the I-80 Echo Interchange

2.1 Developing Reconstruction Closure Scenarios

UDOT engineers wanted several factors taken into account when developing scenarios for the reconstruction. A major concern is road user delays during the construction. Therefore, priority should be given to those days of the week that produce the least congestion and efficiently use available detour routes. From the traffic data provided by UDOT, it was observed that the AADT values are minimum during Mondays, Tuesdays, and weekends. The average of AADTs for Monday and Tuesday are used to represent the typical weekday traffic. From the seasonal variation of traffic demand, it was observed that the traffic was lowest in the months of July and August 2008. Therefore, analysis is done for these months to minimize impact on travelers.

The I-80 Echo corridor network model is built in VISSIM, and AADTs are used to generate the traffic. Two work zone scenarios were developed by UDOT for this project: Echo and Weber River. In both of these scenarios, one direction of traffic is closed at a time and the other direction open to traffic. Each scenario is simulated in VISSIM, and user delay costs were measured separately for each scenario.

3. RESULTS

Table 3.1 summarizes the average daily user delay costs for both Echo and Weber River scenarios. Delay costs are separately calculated for typical weekday (Monday and Tuesday) average, Saturday, and Sunday to distinguish the impacts on both weekday and weekends.

Table 3.1 Average Daily User Delay Costs for Echo and Weber Scenario

Echo Scenario Costs			Web River Scenario Costs		
	July	August		July	August
Mon&Tue Average	\$4,798	\$4,587	Mon&Tue Average	\$4,481	\$4,301
Saturday	\$5,889	\$5,868	Saturday	\$5,579	\$5,544
Sunday	\$5,595	\$5,660	Sunday	\$4,949	\$5,041

The results for the Echo scenario show that average daily user costs would be more for weekends compared to Mondays and Tuesdays averaged for both July and August 2008. The Weber scenario shows the highest user delay cost on Saturdays, followed by Sundays. It is lowest for the Monday and Tuesday average. Since construction should be done on those days with minimum traffic, UDOT should select Mondays and Tuesdays for construction activities to minimize user delay costs and traffic disruption to the travelers in that area. Figure 3.2 and Figure 3.3 are the graphical representations of the above table.

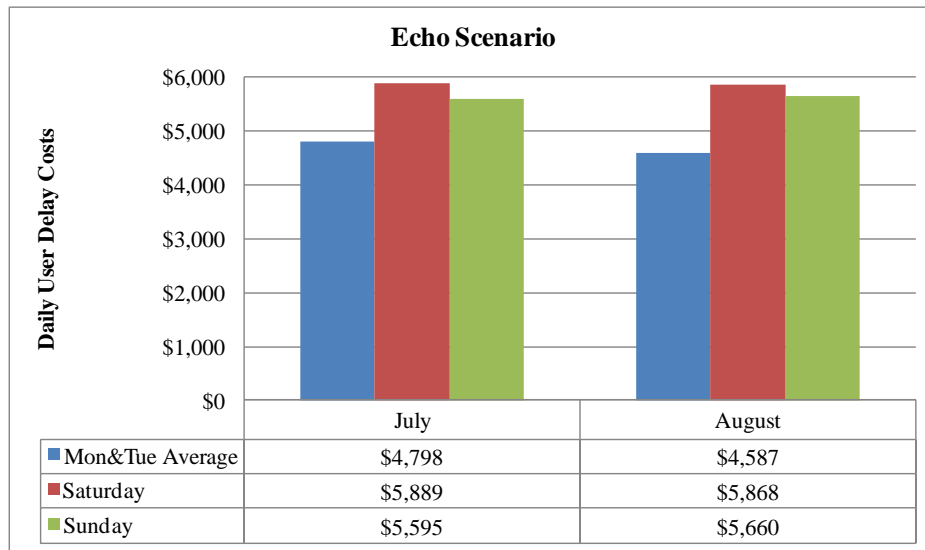


Figure 3.2 Results for Echo Scenario

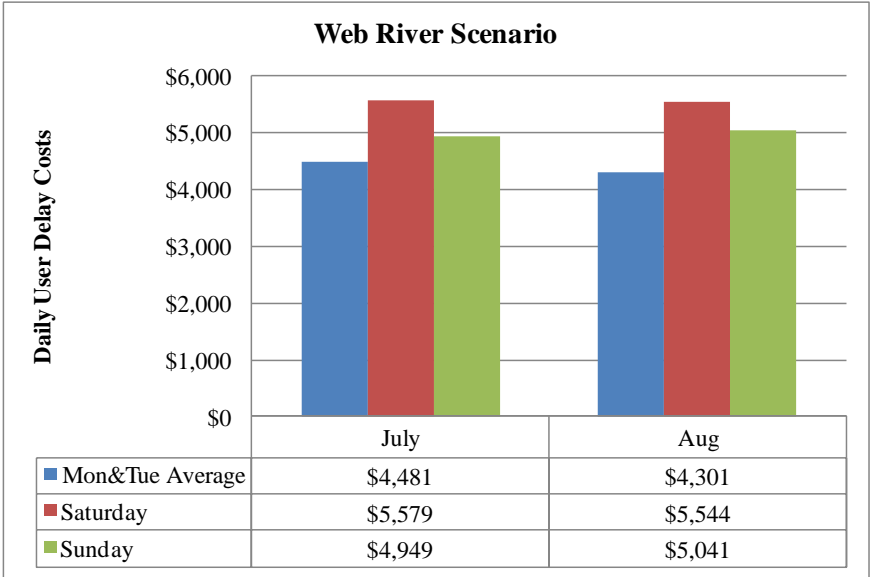


Figure 3.3 Results for Weber Scenario

4. CONCLUSIONS

UDOT will replace two bridge structures near Echo Dam Road on I-80 and Weber River in Summit County, Utah. The proposed work includes removing the existing spans and approaches and replacing them with new structures. The goal of the study is to evaluate the impact of replacing the two bridges on the travelers in Summit area. This research will provide UDOT an estimation of possible delay costs due to traffic disruption resulting from the proposed work zone scenarios near the Echo interchange. VISSIM micro-simulation tool is used to build and calibrate the models. Hourly traffic volumes provided by UDOT are added as vehicle inputs into the model.

In both the Echo and the Weber River scenarios, a single direction of traffic is closed at a time and the other direction is open for traffic. Both these scenarios are simulated and user delay costs are measured separately for each scenario. Results for both the Echo and the Weber River scenarios show that the average daily user delay cost is lower on Mondays and Tuesdays. This suggests that UDOT should perform construction work on those days to ensure minimum traffic disruption to the travelers in that area.

5. FUTURE WORK

The following work needs to be completed as follows:

1. Estimate the user delay cost caused by the replacement of the bridge on 2300 East on I-80. The work will include removing the existing structures and approaches and replacing them with new structures.
2. Determine the day of the week that has minimum user delay cost, so construction work can be performed with minimum traffic disruption.
3. Build, calibrate, and validate a VISSIM model of the 2300 East bridge on I-80 affected area.
4. Add hourly traffic volume provided by UDOT.
5. Develop work zone scenarios upon consultation with UDOT engineers.
6. Model scenarios.
7. Run assignment and estimate travel time delays.
8. Calculate the average daily user cost.

6. REFERENCES

1. New Jersey Department of Transportation. Road User Cost Manual, June 2001.
<http://www.state.nj.us/transportation/eng/documents/RUCM/>. Accessed Jan. 15, 2009.
2. Martin, P. T. and Stevanovic, A. I-15 Reconstruction in Ogden, Utah, Utah Traffic Lab, Report UTL-0305-82, June 2005.
3. Request for Proposals, Utah Department of Transportation, I-80: 2 Bridges near Echo Junction., Project No. F-I80-4(120)165